

mod. **ZP 150**

Self-propelled manual movement at a maximum height of 16 m.

**ZP 150
PIATTAFORMA WITH
MANUAL POSITIONING
FOR ONE OPERATOR AND
FOR INDOOR AND
OUTDOOR USE**



Ascend and descend with the utmost ease and safety.



4 stabilisers that allow the platform to be used in areas that are not flat



Control unit.




an Aerial Platform of over 14 m high, you can transport it in a small pick-up.



I - internal use
E - external use

Technical data

| | ZP8 150 I | ZP8 150 E | ZP10 150 I | ZP10 150 E | ZP12 150 I | ZP12 150 E | ZP14 150 I | ZP14 150 E | ZP16 150 I | ZP16 150 E |
|----------|-----------|-----------|------------|------------|------------|------------|------------|------------|------------|------------|
| USE | Internal | external | Internal | external | Internal | external | Internal | external | Internal | external |
| CAPACITY | 150 kg | 150 kg | 150 kg | 150 kg | 150 kg | 150 kg | 150 kg | 150 kg | 150 kg | 150 kg |
| PEOPLE | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| WEIGHT* | 383 kg | 395 kg | 498 kg | 522 kg | 531 kg | 559 kg | 583 kg | 611 kg | 624 kg | 692 kg |
| A | 7,77 mt | 7,77 mt | 10 mt | 10 mt | 12 mt | 12 mt | 14 mt | 14 mt | 16 mt | 16 mt |
| B | 5,77 mt | 5,77 mt | 8 mt | 8 mt | 10 mt | 10 mt | 12 mt | 12 mt | 14 mt | 14 mt |
| C | 800 mm | 800 mm | 800 mm | 800 mm | 800 mm | 800 mm | 800 mm | 800 mm | 800 mm | 800 mm |
| D | 1980 mm | 1980 mm | 1980 mm | 1980 mm | 2600 mm | 2600 mm | 2980 mm | 2980 mm | 2980 mm | 2980 mm |
| E | 1380 mm | 1380 mm | 1380 mm | 1380 mm | 1380 mm | 1380 mm | 1380 mm | 1380 mm | 1380 mm | 1380 mm |
| F | 670 mm | 670 mm | 670 mm | 670 mm | 670 mm | 670 mm | 670 mm | 670 mm | 670 mm | 670 mm |
| G | 670 mm | 670 mm | 670 mm | 670 mm | 670 mm | 670 mm | 670 mm | 670 mm | 670 mm | 670 mm |
| H | 1360 mm | 2100 mm | 1360 mm | 2550 mm | 1720 mm | 3000 mm | 1720 mm | 3000 mm | 3000 mm | 5000 mm |
| I | 1360 mm | 2100 mm | 1360 mm | 2550 mm | 1720 mm | 3000 mm | 1720 mm | 3000 mm | 3000 mm | 5000 mm |
| L | 360 mm | 730 mm | 220 mm | 580 mm | 400 mm | 810 mm | 400 mm | 1050 mm | 1050 mm | 2040 mm |
| M | 420 mm | 790 mm | 420 mm | 790 mm | 410 mm | 1010 mm | 410 mm | 1250 mm | 1250 mm | 2250 mm |
| N | 400 mm | 400 mm | 400 mm | 400 mm | - | - | - | - | 400 mm | 400 mm |
| O | 1380 mm | 1380 mm | 1380 mm | 1380 mm | 400 mm | 400 mm | 400 mm | 400 mm | 2400 mm | 2400 mm |
| P | 2550 mm | 2550 mm | 2550 mm | 2550 mm | 3000 mm | 3000 mm | 3250 mm | 3250 mm | 3250 mm | 3250 mm |
| Q | 1800 mm | 1800 mm | 1800 mm | 1800 mm | 1700 mm | 1700 mm | 1700 mm | 1700 mm | 1700 mm | 1700 mm |

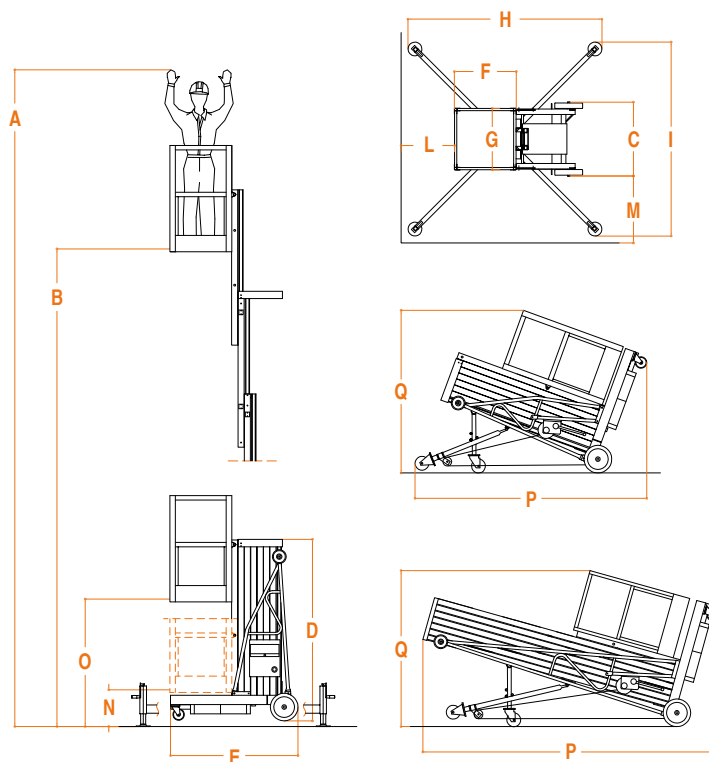

ACCESSORIES (All the accessories on p.70)



- (1) AT 10**
Tractor coupling Kit.
- (2) AT 10.1**
Power Batteries 12V wit
Power connection to the
Tractor.