
41AM Push Around Vertical Lift





41AM Push Around Vertical Lift

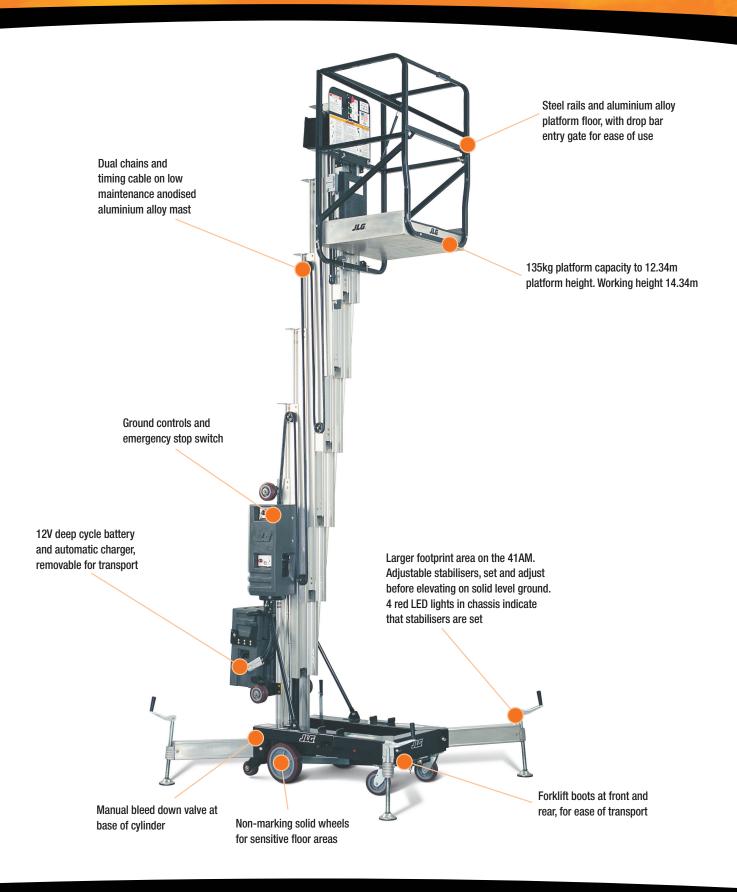

QUESTIONS TO ASK

- · What are the ground conditions in the work area?
- What are the floor load requirements and access to the site?
- What is the working height needed for the job?
- Is there 240V AC power available for charging?
- · Is indoor and flat hard support surface needed?

KEY SELLING POINTS

- · Work in tight and confined vertical areas
- 4 easy fit outriggers with interlock switch and telltale light indicating each outrigger is locked and set
- · Base can be levelled on outriggers
- · Dual chain vertical mast lift
- Non-marking solid tyres
- 1 x 12V DC deep cycle battery
- · Removable SCR automatic battery charger for quick recharging

APPLICATIONS

- · Facilities maintenance
- Electricians for lighting tube/globe replacements
- · All maintenance work
- · Factory fit outs in tight areas
- Ideal warehouse use between racking and narrow aisle areas
- Hospitals, schools and offices for suspended ceiling maintenance

SPECIFICATIONS	
Performance:	
Platform Height (max.)	12.34m
Working Height	14.34m
Lift Time	130 sec
Lower Time	55 sec
Platform Capacity Standard	135kg
Dimensions:	
Stowed Length	1.46m
Stowed Height	2.64m
Height Tilted Back	2.00m
Stabiliser Footprint Length	2.14m
Stabiliser Footprint Width	2.17m
Platforms:	
Standard Platform Type	Steel Rail/Alloy Floor
Overall Width	0.74m
Standard Platform Size - (WxL)	0.66 x 0.66m
Chassis Length	1.35m
Platform Entry Height	0.48m
Power:	
Power Source	Battery
DC Voltage	12V
DC Power	93 Amp hr
Weights and Capabilities:	
GVW AC	499kg
GVW DC	558kg